# **Bern Ottoman Assembly Instructions**


#### Hand Crafted Furniture

Hardware list includes factory installed bolts and washers for side rails attachment.

Note: please find fittings in the carton fastened behind the headboard.


A B D E F I J M O P   Image:	Note: please find items in the carton rastened benind the neadboard.									
Image: Specific state Image: Specific s	A B	A B D		F	Ι	J	М	0		Р
Bolt Bolt Washer Plastic Leg Wrench support leg Bolt Image: Constraint of the support leg Bolt   \$\Phi\text{support leg} \$\Phi\text{support leg} \$\Pmi\text{bolt} \$\Pmi\text{bolt} \$\Pmi\text{classical constraints} \$\Pmi\text{constraints} \$\Pmiconstr	Im Im O		0			٩	IM			
32 PCS   10 PCS   1 PC   42 PCS   4 PCS   1 PC   1 PC   1 PC   1 PC   2 PCS	Bolt Bolt	Washer	Washer Plastic Leg				Bolt			
	8*30MM\$\$*45MM \$\$6MM \$\$8MM \$		H=13CM	Φ8MM	H=25CM	Φ6*40MM	Center support rail Lift up frame		lift up frame	
Q   R   S   U1   U2   Y   Z2     Image: Constraint of the second se	32 PCS 10 PCS	1 PC	42 PCS 4 PCS		1 PC 1 PC 1 PC		1 PC	2 PCS		
	Q	R	S		U1			U2	Y	Z2
					A design of the second se					
Φ8MM		10						~4		Φ8MM
Brackethydraulic rodStorage-boardSlat system support beamSlat system support beamWrenchNut	Brackel		Storage-board		Slat system support beam				Wrench	Nut
2 PCS 2 PCS 2 PCS 1 PC 1 PC 4 PCS	2 PCS 2 PCS		2 PCS		1 PC			1 PC	1 PC	4 PCS

Assembly Steps:

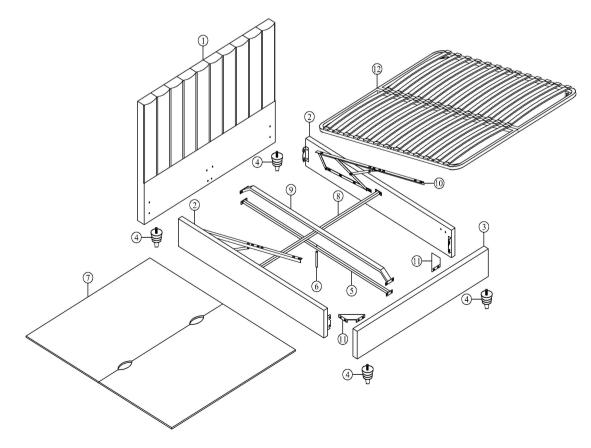

## Step#1

Retrieve bed feet from carton fastened in the back of headboard. Attach bed feet (F) to the headboard / Footboard .



## Step#2

Attach lift up Arms (P) to the side rails using Wrench (I), Bolt (A) and Washer (E).


\* Bolt(A) and Washer(E) are fixed to the Side rails, Please remove them before you install.\*

Left Side Rails


Right Side Rails

## Step#3

Attach hydraulic rod (R) to connect the lift up Arms. Tighten/secure Nut (Z<sub>2</sub>) using Wrench (Y) until snug.



\* Nut(Z) are fixed to the Arms, Please remove them before you install.\*




#### Step#4

Loosen Bolt (A) & Washer (E) ,attach side Rails to headdboard and footboard using Wrench (I), Bolt (A) and Washer (E).

#### Step#5

Attach center support legs (J) to the Center Support (O) using Wrench (I), Bolt (M) and Washer (D).

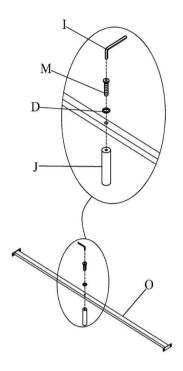


#### Step#6

Loosen Bolt (A) & Washer (E) ,attach angle bracket to rails & footboard using Wrench (I), Bolt (A) and Washer (E).


#### Step#7

Remove Bolt (A) & Washer (E) on the middle of headboard & footboard, attach steel center support (O) to the headboard and footboard using Bolt (A) and washer (E).

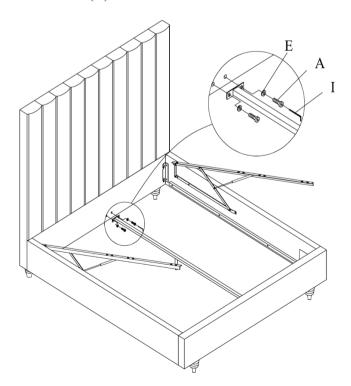

#### Step#8

Put storage board (S) on the support rails.




## Step#10

Remove Bolt (B) & Washer (E), attach steel center support (U1) to the headboard and footboard using Bolt (B) and washer (E).

#### Step#9

Remove Bolt (A) & Washer (E) on the middle of side rails, Attach center support Rails (U2) to the side rails using Wrench (I), Bolt (B) and Washer



#### Step#11

Move/place bed into final position in bedroom. Ottoman pistons must be connected to arms and boards placed on top. The base needs to be pressed open and closed with heatvy in them to ensure the

pistons are working.

